

Registration No. 1282

JAXA-QTS-2110/A122E

1 October 2023

Superseding

JAXA-QTS-2110/A122D

Cancelled

1 October 2023

TRANSFORMERS AND INDUCTORS, POWER,
HIGH RELIABILITY, SPACE USE,
(NASDA 2110/A122 TYPE)
DETAIL SPECIFICATION FOR

Prepared and Established by TAMURA Corporation

Issued by Japan Aerospace Exploration Agency

This document is the English version of JAXA QTS/ADS which was originally written and authorized in Japanese and carefully translated into English for international users. If any question arises as to the context or detailed description, it is strongly recommended to verify against the latest official Japanese version.

The release date of the English version of this specification: 1 July 2025

JAXA-QTS-2110/A122E 1 October 2023		J A X A Parts Specification	Page	– i –
Record of revisions				
Rev.	Date	Description		
NC	30 Sep. 2005	Original		
A	7 Feb. 2008	Reflected the change of document by TAMURA Corporation Document No: E-A4-30331 (Rev. A)		
B	30 May 2012	Reflected the change of document by TAMURA Corporation Document No: E-A4-30331 (Rev. B)		
C	3 July 2017	Reflected the change of document by TAMURA Corporation Document No: E-A4-30331 (Rev. C)		
D	1 Apr. 2019	Reflected the change of document by TAMURA Corporation Document No: E-A4-30331 (Rev. D)		
E	13 Dec. 2019	Reflected the change of document by TAMURA Corporation Document No: E-A4-30331 (Rev. E)		
		The remainder of this page is intentionally left blank.		

JAXA-QTS-2110/A122E 1 October 2023		J A X A Parts Specification	Page	– ii –
E-A4-30331E				
Revision history				
Rev.	Date	Descriptions		
NC	30 Sept. 2005	Original		
A	20 June 2012	<p>Changed the temperature at the 3rd step of Thermal shock from 115°C to 130°C in Table 3.</p> <p>(The temperature of 130°C means the maximum operating temperature in this detail specification.)</p>		
B	3 July 2017	<p>Paragraph 1.1: Scope Added the wording “The products per this specification are manufactured or Wakayanagi Tamura Corporation (Kurihara city of Miyagi)” in the text.</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass Added the wording “Additionally, manufacture line identification letter “W” is added to...” and a marking example in (4).</p>		
C	1 Apr. 2019	<p>Paragraph 1.1: Scope Deleted the description about TAMURA Corporation (Sakado city of Saitama) due to unification of the facility.</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass</p> <ul style="list-style-type: none"> · Changed description due to unification of the facility. · Changed the wording "manufacturer line identification letter" to "manufacturer line letter" in the text and marking example. 		
D	13 Dec. 2019	<p>Paragraph 1.1: Scope Added the wording “The transformers and inductors specified herein do not meet outgassing requirements.” in the text.</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass Added the wording “and manufacture line letter” in item (4). (error corrected)</p> <p>Paragraph 4.5: Change to tests and inspections Changed the description to add the shortening of applied time of the test voltage in insulation resistance test.</p>		
E	1 Oct. 2023	<p>Paragraph 2: Applicable Documents Changed the wording from "Applicable documents shall be as specified in paragraph A.2.1, appendix A of JAXA-QTS-2110." to "Applicable documents shall be in accordance with paragraph A.2.1, appendix A of JAXA-QTS-2110 and as follows." in the text.</p> <p>Added MIL-W-16878E as an applicable document in item a).</p> <p>Added the note “* As soon as the insulated electrical wires of the MIL-W-16878D are no longer available, those wires of the MIL-W-16878E shall be applied.” in item a).</p> <p>(Due to change in the revision letter of the applicable document “MIL-W-16878” for PTFE wire.)</p>		

JAXA-QTS-2110/A122E 1 October 2023	J A X A Parts Specification	Page	– iii –
			E-A4-30331E
Contents			
1. GENERAL			1
1.1 Scope.....			1
1.2 Part Number.....			1
1.3 Rating			1
2. APPLICABLE DOCUMENTS.....			2
3. REQUIREMENTS			2
3.1 Qualification Coverage			2
3.2 Externals, Construction, Dimensions, Marking and Mass			2
3.3 Performance			4
3.4 Electrical Characteristic.....			6
4. QUALITY ASSURANCE PROVISIONS.....			7
4.1 In-Process Inspection.....			7
4.2 Qualification Test			7
4.3 Quality Conformance Inspection			7
4.4 Long-Term Storage			7
4.5 Change to Tests and Inspections			7
5. PREPARATION FOR DELIVERY			7
6. NOTE			7

**TRANSFORMERS AND INDUCTORS, POWER,
HIGH RELIABILITY, SPACE USE,
(NASDA 2110/A122 TYPE)
DETAIL SPECIFICATION FOR**

1. GENERAL

1.1 Scope

This specification establishes the detail requirements for transformers and inductors with an PQ ferrite core (NASDA 2110/A122 type) specified in JAXA-QTS-2110. The products under this specification are manufactured in Wakayanagi Tamura Corporation (Kurihara city of Miyagi).

The transformers and inductors specified in this specification do not meet outgassing requirements.

1.2 Part Number

The part number shall be indicated in accordance with paragraph A.1.2, appendix A of JAXA-QTS-2110 as shown below. When a purchaser designates a specific part number, corresponding part number in this specification shall be stipulated in a product specification.

(Example)

NASDA⁽¹⁾ 2110/A122 – T000

|
Identification number

Note: ⁽¹⁾ "NASDA" indicates the part is for space use and may be abbreviated "N".

1.3 Rating

The rating shall be as specified in Table 1.

Table 1. Rating

Item	Applicable paragraph of JAXA-QTS-2110	Identification number	
		T000	T001 or subsequent
Grade	A.3.3.8	6 (open type)	
Operating ambient temperature	–	-55 to +100°C	As specified in the product specification.
Class	A.3.6.1	S (130°C)	
Operating frequency	–	100kHz	
Input voltage	–	60Vrms	
Output power	–	81VA	

JAXA-QTS-2110/A122E 1 October 2023	J A X A Parts Specification	Page	– 2 –
---------------------------------------	--------------------------------	------	-------

E-A4-30331E

2. APPLICABLE DOCUMENTS

Applicable documents shall be in accordance with paragraph A.2.1, appendix A of JAXA-QTS-2110 and as follows.

a) MIL-W-16878E: Wire, Electrical, Insulated, General Specification for

* As soon as the insulated electrical wires of the MIL-W-16878D are no longer available, those wires of the MIL-W-16878E shall be applied.

3. REQUIREMENTS

Requirements shall be as specified in paragraph A.3, appendix A of JAXA-QTS-2110 and as follows.

3.1 Qualification Coverage

The qualification coverage shall be as specified in Table 2.

Table 2. Qualification Coverage

No.	Item	Specification to be covered
1	Class (maximum operating temperature)	S (130°C) maximum
2	External/internal mounting construction	Screwing
	External dimensions (mm)	42 x 54 x 45 ^H maximum
	Total volume (cm ³)	102.06 maximum
3	Operating voltage	175V _{peak} maximum
	Insulator	Polyester, equivalent or better
4	Magnet wire diameter (mm)	φ0.10 minimum
	Coating material	Polyester, equivalent or better
5	Grade	6
	Insulation, impregnation, and filling material	Epoxy impregnation
6	Construction and material of terminal	PTFE lead wire (AWG 30 to AWG 18) Direct wiring wire (φ0.4mm to φ1.14mm)
	Terminal strength	MIL-STD-202, test method 211, test condition A PTFE lead wire: 13.7N maximum (AWG 28 to 18) PTFE lead wire: 9.8N maximum (AWG 30 to 28) Direct wiring wire: 9.8N maximum
7	Shock	MIL-STD-202, test method 213 Test conditions: 840G, 0.6ms, half sine wave maximum
	Vibration	MIL-STD-202, test method 204, test condition D maximum MIL-STD-202, test method 214, test condition II-H maximum
8	Core material	Ferrite
	Core shape	PQ type
9	Dielectric withstanding voltage	AC 500V maximum

3.2 Externals, Construction, Dimensions, Marking and Mass

The externals, constructions, dimensions and mass shall be as specified in **Figure 1**

Marking items shall be as follows in accordance with paragraph A.3.4.1, appendix A of

JAXA-QTS-2110. If the product specification has marking requirements, marking shall be made as specified in the product specification. Marking location shall be as shown in **Figure 1**. Additionally, manufacture line letter “W” is added to the end of the serial number or to the location specified in the product specification.

- (1) Part number in this specification
- (2) Terminal identification (see **Figure 1**)
- (3) Lot identification code
- (4) Serial number and manufacture line letter

(Marking example)


Serial number ^{No. 1} ^W Manufacture line letter:
Letter “W”: Wakayanagi Tamura Corporation

- (5) Trademark

If the marking area on the transformer or inductor is limited, the items above may be abbreviated or omitted in the following order of precedence.

- (1) “2110/A” of the part number
- (2) Trademark

E-A4-30331E

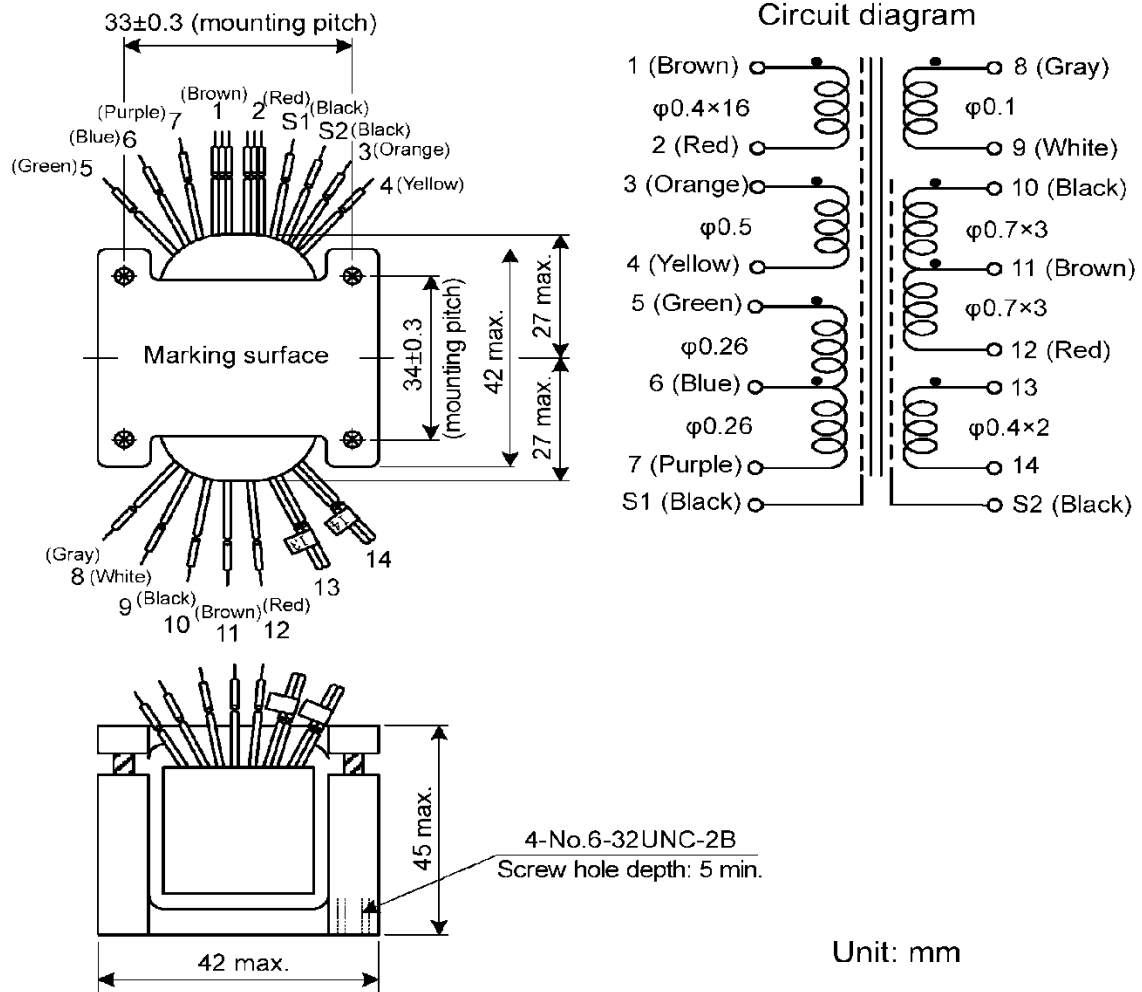

- Lead wire length: 100mm minimum
 AWG 18 x 3 for terminal no. 1, 2
 AWG 22 for terminal no. 5, 6, 7, 10, 11, 12
 AWG 24 for terminal no. 3, 4
 AWG 30 for terminal no. 8, 9
 Direct wiring wires of φ0.4mm x 2 for terminal no. 13, 14
 AWG 28 for terminal no. S1, S2
 Coating removed for length of approx.10mm at the end.
- Mass: 220g maximum

Figure 1. Externals, Construction, Dimension, Marking and Mass ⁽¹⁾

Note: ⁽¹⁾ **Figure 1** shall be applicable to all certified products. Externals, construction, dimensions, marking and mass of Individual product included in the qualification coverage shall be as specified in the product specification.

3.3 Performance

Performance requirements shall be as specified in Table 3.

JAXA-QTS-2110/A122E 1 October 2023		J A X A Parts Specification	Page	– 5 –
E-A4-30331E				
Table 3. Performance Requirements ⁽¹⁾				
Item	Requirement paragraph of JAXA-QTS-2110	Performance		
Electrical characteristics	A.3.7.1	As specified in Table 4		
Dielectric withstanding voltage	A.3.7.2	At sea level Between windings: AC500V for 1 minute Between windings and hardware: AC500V for 1 minute Between windings and shields: AC500V for 1 minute Between shields and hardware: AC500V for 1 minute At reduced pressure Between windings: AC300V, 1.1kPa for 1 minute Between windings and hardware: AC300V, 1.1kPa for 1 minute Between windings and shields: AC300V, 1.1kPa for 1 minute Between shield and hardware: AC300V, 1.1kPa for 1 minute		
Interlayer withstanding voltage	A.3.7.3	200kHz, sine wave of 120Vrms applied between (1-2) for 5±0.5s		
Insulation resistance	A.3.7.4	Between windings: DC100V, a) 10,000MΩ minimum Between windings and hardware: DC100V, a) 10,000MΩ minimum Between windings and shields: DC100V, a) 10,000MΩ minimum Between shields and hardware: DC100V, a) 10,000MΩ minimum		
Corona discharge	A.3.7.5	N/A		
Temperature rise	A.3.7.6	30°C maximum (ambient temperature: 100°C)		
Overload	A.3.7.7	Ambient temperature: 130°C – measured temperature rise		
Electrical Continuity	A.3.7.8	As specified in appendix A of JAXA-QTS-2110.		
Terminal strength (pull)	A.3.8.1	PTFE lead wire: 13.7N (AWG 28 to 18) PTFE lead wire: 9.8N (AWG 30 to 28) Direct wiring wire: 9.8N		
Solderability	A.3.8.2	N/A		
Resistance to soldering heat	A.3.8.3	N/A		
Seal	A.3.8.4	N/A		
Vibration	A.3.9.1	High frequency: As specified in appendix A of JAXA-QTS-2110. Random: As specified in appendix A of JAXA-QTS-2110.		
Shock	A.3.9.2	Test conditions: 840G, 0.6ms, semi sine wave		
Thermal shock	A.3.9.3	Test condition A-1 (temperature at the 3rd step: 130°C)		
Immersion	A.3.9.4	N/A		
Moisture resistance	A.3.9.5	As specified in appendix A of JAXA-QTS-2110.		
Flammability	A.3.9.6	N/A		
Resistance to solvents	A.3.9.7	N/A		
Life	A.3.10.1	Ambient temperature: 130°C – measured temperature rise		
Note ⁽¹⁾ This table shall be applicable to all certified products. Performance of individual product included in the qualification coverage shall be as specified in the product specification.				

E-A4-30331E

3.4 Electrical Characteristic

The electrical characteristics shall be as shown in **Table 4****Table 4. Electrical Characteristics ⁽¹⁾**

Item	Rating
Operating frequency	100kHz±10% (sine wave)
Power supply voltage	60Vrms
Winding ratio	$(3-4) / (1-2) = 2.000 \pm 3\%$ $(5-6) / (1-2) = 1.00 \pm 3\%$ $(6-7) / (1-2) = 1.00 \pm 3\%$ $(8-9) / (1-2) = 0.500 \pm 4\%$ $(10-11) / (1-2) = 0.800 \pm 3\%$ $(11-12) / (1-2) = 0.800 \pm 3\%$ $(13-14) / (1-2) = 1.00 \pm 3\%$
Inductance	(1-2) = 100μH minimum at 100kHz, 0.5V
DC resistance (at 20°C)	(1-2) = 0.01Ω maximum, (8-9) = 1.6Ω maximum (3-4) = 0.20Ω maximum, (10-11) = 0.03Ω maximum (5-6) = 0.40Ω maximum, (11-12) = 0.03Ω maximum (6-7) = 0.40Ω maximum, (13-14) = 0.08Ω maximum
Output	81VA
Polarity	Test points 1, 3, 5, 6, 8, 10, 11, and 13 shall have the same polarity.
Test circuit	

Note⁽¹⁾: This table shall be applicable to all certified products. Electrical characteristics of individual product included in the qualification coverage shall be as specified in the product specification.

JAXA-QTS-2110/A122E 1 October 2023	J A X A Parts Specification	Page	– 7 –
			E-A4-30331E
4. QUALITY ASSURANCE PROVISIONS			
Quality assurance provisions shall be as specified in paragraph A.4, appendix A of JAXA-QTS-2110.			
4.1 In-Process Inspection			
The in-process inspection shall be as specified in paragraph A.4.1, appendix A of JAXA-QTS-2110.			
4.2 Qualification Test			
The qualification test shall be as specified in paragraph A.4.2, appendix A of JAXA-QTS-2110.			
4.3 Quality Conformance Inspection			
The quality conformance inspection shall be as specified in paragraph A.4.3, appendix A of JAXA-QTS-2110.			
4.4 Long-Term Storage			
Long-term storage shall be as specified in paragraph A.4.5, appendix A of JAXA-QTS-2110.			
4.5 Change to Tests and Inspections			
a) Insulation Resistance			
(Standard)			
Insulation resistance in accordance with test method 302 of MIL-STD-202 is specified as follows.			
“If the instrument reading indicates that an insulation resistance meets the specified limit (2 minimum), and is steady or increasing, the test may be terminated before the end of the specified period (2 minimum) “			
(Shortening of test time)			
From the test result and verification result, it was verified that the instrument reading increases or become stable within 2 minutes from the start of voltage application. Therefore, when the above condition is met and the measurement reaches the 10-times of 10 thousand MΩ as a minimum (which is more than 100 thousand MΩ), the test may be terminated before 2-minute passes.			
5. PREPARATION FOR DELIVERY			
Preparation for delivery shall be as specified in paragraph A.5, appendix A of JAXA-QTS-2110.			
6. NOTE			
Details of notes shall be as specified in paragraph A.6, appendix A of JAXA-QTS-2110.			