

# Cancelled

Title: TRANSFORMERS AND INDUCTORS, POWER,  
HIGH RELIABILITY,SPACE USE,  
DETAIL SPECIFICATION FOR  
(NASDA 2110/A124 TYPE)

Document number: JAXA-QTS-2110/A124D

Cancellation date: 1 October 2023

JAXA  
JAPAN AEROSPACE EXPLORATION AGENCY

Registration No. 1221

JAXA-QTS-2110/A124D  
13 December 2019

Superseding  
JAXA-QTS-2110/A124C  
Cancelled  
13 December 2019

TRANSFORMERS AND INDUCTORS, POWER,  
HIGH RELIABILITY, SPACE USE,  
DETAIL SPECIFICATION FOR

(NASDA 2110/A124 TYPE)

Prepared and Established by Tamura Corporation

Issued by Japan Aerospace Exploration Agency

This document is the English version of JAXA QTS/ADS which was originally written and authorized in Japanese and carefully translated into English for international users. If any question arises as to the context or detailed description, it is strongly recommended to verify against the latest official Japanese version.

The release date of the English version of this specification: June 25, 2021

### Revision Log

| Rev. | Date             | Changes   |
|------|------------------|---|
| NC   | 30 Sept.<br>2005 | Original  |
| A    | 30 May<br>2012   | Changed the temperature at 3rd step of Thermal shock from 95°C to 105°C in Table 3. (105°C to be the highest operating temperature)   |
| B    | 5 Feb.<br>2016   | Paragraph 1.1: Scope: Added “The products per this specification are manufactured ...or Wakayanagi Tamura Corporation (Kurihara city of Miyagi)”<br>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass: Added “Additionally, manufacture line identification code “W” is added to...” and a marking example in (4).   |
| C    | 1 Apr.<br>2019   | Paragraph 1.1: Scope: Deleted the description about Tamura Corporation (Sakado city of Saitama) due to unification of the facility.<br>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass:<br><ul style="list-style-type: none"> <li>▪ Changed description due to unification of the facility.</li> <li>▪ Changed manufacturer line identification letter to manufacturer line letter in the text and marking example.</li> </ul> |
| D    | 13 Dec.<br>2019  | Paragraph 1.1: Scope: Added “The transformers and inductors specified herein do not meet outgassing requirements.”<br>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass:<br>(4) Added “and manufacture line letter”. (error corrected)<br>Paragraph 4.5: Change to tests and inspections: Added the description about the shortening of applied time of the test voltage in insulation resistance test.                          |
|      |                  |   |

|   |                                |      |        |
|---|--------------------------------|------|--------|
| JAXA-QTS-2110/A124D<br>13 December 2019                         | J A X A<br>Parts Specification | Page | – ii – |
| <b>Contents</b>   |                                |      |        |
| 1. GENERAL .....  |                                | 1    |        |
| 1.1 Scope.....  |                                | 1    |        |
| 1.2 Part Number .....   |                                | 1    |        |
| 1.3 Rating .....  |                                | 1    |        |
| 2. APPLICABLE DOCUMENTS.....                                    |                                | 2    |        |
| 3. REQUIREMENTS .....   |                                | 2    |        |
| 3.1 Qualification Coverage .....                                |                                | 2    |        |
| 3.2 Externals, Construction, Dimensions, Marking and Mass ..... |                                | 3    |        |
| 3.3 Performance .....   |                                | 5    |        |
| 3.4 Electrical Characteristics .....                            |                                | 6    |        |
| 4. QUALITY ASSURANCE PROVISIONS.....                            |                                | 7    |        |
| 4.1 In-Process Inspection.....                                  |                                | 7    |        |
| 4.2 Qualification Test .....                                    |                                | 7    |        |
| 4.3 Quality Conformance Inspection .....                        |                                | 7    |        |
| 4.4 Long-Term Storage .....                                     |                                | 7    |        |
| 4.5 Change to Tests and Inspections .....                       |                                | 7    |        |
| 5. PREPARATION FOR DELIVERY.....                                |                                | 7    |        |
| 6. NOTES.....   |                                | 7    |        |

**NASDA 2110/A124 TYPE,  
TRANSFORMERS AND INDUCTORS, POWER,  
HIGH RELIABILITY, SPACE USE,  
DETAIL SPECIFICATION FOR**

**1. GENERAL**

**1.1 Scope**

This specification establishes the detail requirements for toroidal transformers and inductors with an amorphous core (NASDA 2110/A124 type) of space use, high reliability, transformers and inductors that satisfied JAXA-QTS-2110, Transformers and Inductors, High Reliability, Space use, General Specification for. The products per this specification are manufactured in Wakayanagi Tamura Corporation (Kurihara city of Miyagi).

The transformers and inductors specified herein do not meet outgassing requirements.

**1.2 Part Number**

The part number shall be indicated in accordance with paragraph A.1.2, Appendix A of JAXA-QTS-2110 as shown below. When there is a part number defined by purchaser, a part number defined in this specification shall be also provided in a product specification.

(Example)

NASDA<sup>(1)</sup> 2110/A124 – T000

|  
Characteristic identifier

Note: <sup>(1)</sup> "NASDA" indicates the part is for space use and may be abbreviated "N".

**1.3 Rating**

The rating shall be as specified in Table 1.

**Table 1. Rating**

| Item                          | Applicable paragraph of JAXA-QTS-2110 | Characteristic identifier |  |
|-------------------------------|---------------------------------------|---------------------------|--|
|                               |                                       | T000                      | T001 or subsequent                         |
| Grade                         | A.3.3.8                               | 6 (open type)             |  |
| Operating ambient temperature | –                                     | -55 to +85°C              | As specified in the product specification. |
| Class                         | A.3.6.1                               | R (105°C)                 |  |
| Operating frequency           | –                                     | 20kHz                     |  |
| Input voltage                 | –                                     | 20Vrms                    |  |
| Output power                  | –                                     | 10.4VA                    |  |

## 2. APPLICABLE DOCUMENTS

Applicable documents shall be as specified in Section A.2, Appendix A of JAXA-QTS-2110.

## 3. REQUIREMENTS

Requirements shall be as follows and as specified in Section A.3, Appendix A of JAXA-QTS-2110.

### 3.1 Qualification Coverage

The qualification coverage shall be as specified in Table 2.

**Table 2. Qualification Coverage**

| No. | Item   | Specification   |
|-----|--|---|
| 1   | Class (maximum operating temperature)          | R (105°C) max.  |
| 2   | External/internal mounting construction        | Adhesion or combination of adhesion and screwing  |
|     | External dimensions (mm)                       | φ27 x 13 <sup>H</sup> max.  |
|     | Total volume (cm <sup>3</sup> )                | 7.44 max.   |
| 3   | Operating voltage                              | 175V <sub>peak</sub> max.   |
|     | Insulator                                      | Polyester, equivalent or better   |
| 4   | Magnet wire diameter (mm)                      | φ0.12 min.  |
|     | Coating material                               | Polyurethane, equivalent or better  |
| 5   | Grade  | 6   |
|     | Insulation, impregnation, and filling material | Epoxy impregnation  |
| 6   | Construction and material of terminal          | PTFE lead wire (28 to 18 AWG)<br>Direct wiring wire (φ0.4mm to φ1.14mm)                                       |
|     | Terminal strength                              | MIL-STD-202, test method 211, test condition A<br>PTFE lead wire: 13.7N max.<br>Direct wiring wire: 9.8N max. |
| 7   | Shock  | MIL-STD-202, test method 213<br>Test condition: E (1,000G, 0.5ms, half sine wave) max.                        |
|     | Vibration                                      | MIL-STD-202, test method 204, test condition D max.<br>MIL-STD-202, test method 214, test condition II-H max. |
| 8   | Core material                                  | Amorphous   |
|     | Core shape                                     | Toroidal type   |
| 9   | Dielectric withstanding voltage                | AC 500V max.  |

### 3.2 Externals, Construction, Dimensions, Marking and Mass

The externals, construction, dimensions and mass shall be as specified in Figure 1. Marking items shall be as follows in accordance with paragraph A.3.4.1, Appendix A of JAXA-QTS-2110. If the marking requirements are specified in the product specification, the marking shall satisfy the requirements. Additionally, manufacture line identification code “W” is added to the end of the serial number or to the location specified in the product specification if the products are manufactured in Wakayanagi Tamura Corporation. For the products manufactured in Tamura Corporation, no manufacture line identification code will be added to the marking.

- (1) Part number in this specification
- (2) Terminal identification (See Figure 1)
- (3) Lot identification code
- (4) Serial number and manufacture line letter

(Marking example)


Serial number            NO.1 W Manufacture line letter  
Letter “W”: Wakayanagi Tamura Corporation

- (5) Trademark

If the marking area on the transformer or inductor is limited, the items above may be abbreviated or omitted in the following order of precedence.

- (1) “2110/A” of the part number
- (2) Trademark



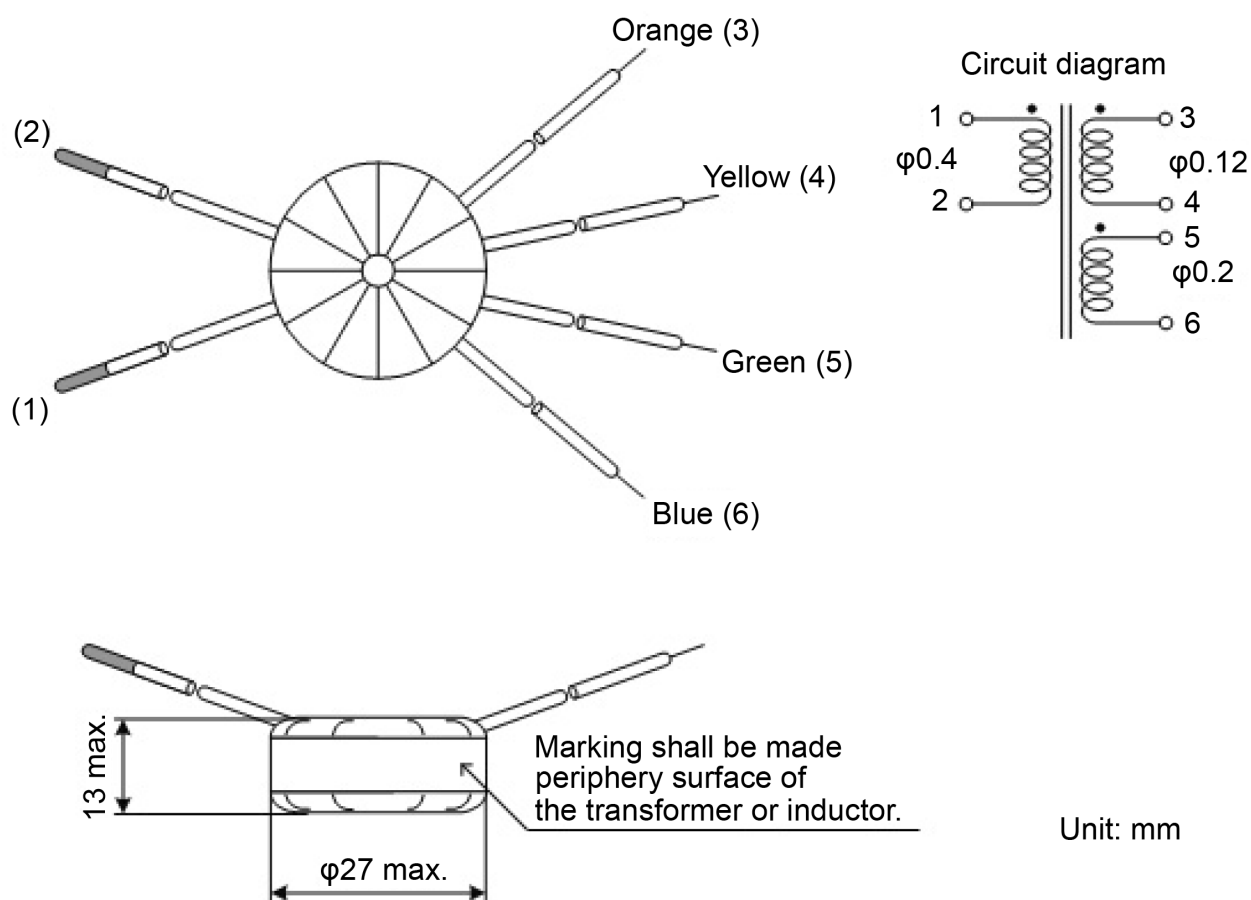

1. Lead wire length: 100mm min.  
Direct wiring wires of  $\phi 0.4$ mm for terminals 1, 2  
No. 28 AWG for terminals 3, 4, 5, 6  
Coating removed approx. 10mm at the end
2. Mass: 17g max.

**Figure 1. Externals, Construction, Dimensions, Marking and Mass<sup>(1)</sup>**

Note: <sup>(1)</sup> Figure 1 shall be applicable to all certified products. Externals, construction, dimensions, marking and mass of Individual product included in the qualification coverage shall be as specified in the product specification.

### 3.3 Performance

Performance requirements shall be as specified in Table 3.

**Table 3. Performance Requirements<sup>(1)</sup>**

| Item                            | Requirement paragraph of JAXA-QTS-2110 | Performance  |
|---------------------------------|--|--|
| Electrical characteristics      | A.3.7.1                                | As specified in Table 4.   |
| Dielectric withstanding voltage | A.3.7.2                                | At barometric pressure: AC500V for 1 minute<br>At reduced pressure: AC300V, 1.1kPa for 1 minute                            |
| Interlayer withstanding voltage | A.3.7.3                                | 40kHz, sine wave of 40Vrms applied between (1-2) for 5±0.5s  |
| Insulation resistance           | A.3.7.4                                | DC100V, a) 10,000MΩ min.   |
| Corona discharge                | A.3.7.5                                | N/A  |
| Temperature rise                | A.3.7.6                                | 20°C max. (ambient temperature: 85°C)  |
| Overload                        | A.3.7.7                                | Ambient temperature: 105°C – measured temperature rise   |
| Conductivity                    | A.3.7.8                                | As specified in Appendix A of JAXA-QTS-2110.   |
| Terminal strength (pull)        | A.3.8.1                                | PTFE lead wire: 13.7N<br>Direct wiring wire: 9.8N  |
| Solderability                   | A.3.8.2                                | N/A  |
| Resistance to soldering heat    | A.3.8.3                                | N/A  |
| Seal                            | A.3.8.4                                | N/A  |
| Vibration                       | A.3.9.1                                | High frequency:<br>As specified in Appendix A of JAXA-QTS-2110.<br>Random:<br>As specified in Appendix A of JAXA-QTS-2110. |
| Shock                           | A.3.9.2                                | Test condition: E (1,000G, 0.5ms, semi sine wave)  |
| Thermal shock                   | A.3.9.3                                | Test condition A-1 (temperature at 3rd step: 105°C)  |
| Immersion                       | A.3.9.4                                | N/A  |
| Moisture resistance             | A.3.9.5                                | As specified in Appendix A of JAXA-QTS-2110.   |
| Flammability                    | A.3.9.6                                | N/A  |
| Resistance to solvent           | A.3.9.7                                | N/A  |
| Life                            | A.3.10.1                               | Ambient temperature: 105°C – measured temperature rise   |

Note <sup>(1)</sup> This table shall be applicable to all qualified products. Performance of individual product included in the qualification coverage shall be as specified in the product specification.

### 3.4 Electrical Characteristics

The electrical characteristics shall be as shown in Table 4.

**Table 4. Electrical Characteristics<sup>(1)</sup>**

| Item                       | Rating   |
|----------------------------|--|
| Operating frequency        | 20kHz±10% (sine wave)  |
| Input voltage              | 20Vrms   |
| Winding ratio              | $(3-4) / (1-2) = 6.19 \pm 3\%$<br>$(5-6) / (1-2) = 1.27 \pm 3\%$ |
| Impedance                  | (1-2) = 1kΩ min. at 20kHz, 10V                                   |
| DC resistance<br>(at 20°C) | (1-2) = 0.45Ω max.<br>(3-4) = 23Ω max.<br>(5-6) = 1.8Ω max.      |
| Output                     | 10.4VA   |
| Polarity                   | Test points 1, 3, and 5 shall have the same polarity.            |
| Test circuit               |  |

Note <sup>(1)</sup> This table shall be applicable to all certified products. Electrical characteristics of individual product included in the qualification coverage shall be as specified in the product specification.

|  |                                |      |       |
|--|--------------------------------|------|-------|
| JAXA-QTS-2110/A124D<br>13 December 2019  | J A X A<br>Parts Specification | Page | – 7 – |
| <p>4. QUALITY ASSURANCE PROVISIONS</p> <p>Quality assurance provisions shall be as specified in Section A.4, Appendix A of JAXA-QTS-2110.</p> <p>4.1 In-Process Inspection</p> <p>The in-process inspection shall be as specified in paragraph A.4.1, Appendix A of JAXA-QTS-2110.</p> <p>4.2 Qualification Test</p> <p>The qualification test shall be as specified in paragraph A.4.2, Appendix A of JAXA-QTS-2110.</p> <p>4.3 Quality Conformance Inspection</p> <p>The quality conformance inspection shall be as specified in paragraph A.4.3, Appendix A of JAXA-QTS-2110.</p> <p>4.4 Long-Term Storage</p> <p>Long-term storage shall be as specified in paragraph A.4.5, Appendix A of JAXA-QTS-2110.</p> <p>4.5 Change to Tests and Inspections</p> <p>a) Insulation Resistance</p> <p>(Standard) Insulation resistance in accordance with test method 302 of MIL-STD-202 is specified as follows. “If the instrument reading indicates that an insulation resistance meets the specified limit (2 min.), and is steady or increasing, the test may be terminated before the end of the specified period (2 min.)”</p> <p>(Shortening of test time) From the test result and verification result, it was verified that the instrument reading increases or become stable within 2 minutes from the start of voltage application. Therefore, when the above condition is met and the measurement reaches the 10-times of 10 thousand MΩ as a minimum (which is more than 100 thousand MΩ), the test may be terminated before 2-minute passes.</p> <p>5. PREPARATION FOR DELIVERY</p> <p>Preparation for delivery shall be as specified in Section A.5, Appendix A of JAXA-QTS-2110.</p> <p>6. NOTES</p> <p>Details of notes shall be as specified in Section A.6, Appendix A of JAXA-QTS-2110.</p> |                                |      |       |