

Registration No. 1283

JAXA-QTS-2110/A124E

1 October 2023

Superseding

JAXA-QTS-2110/A124D

Cancelled

1 October 2023

TRANSFORMERS AND INDUCTORS, POWER,
HIGH RELIABILITY, SPACE USE,
(NASDA 2110/A124 TYPE)
DETAIL SPECIFICATION FOR

Prepared and Established by TAMURA Corporation

Issued by Japan Aerospace Exploration Agency

This document is the English version of JAXA QTS/ADS which was originally written and authorized in Japanese and carefully translated into English for international users. If any question arises as to the context or detailed description, it is strongly recommended to verify against the latest official Japanese version.

The release date of the English version of this specification: 1 July 2025

JAXA-QTS-2110/A124E 1 October 2023		J A X A Parts Specification	Page	– i –
Record of revisions				
Rev.	Date	Description		
NC	30 Sep. 2005	Original		
A	7 Feb. 2008	Reflected the change of document by TAMURA Corporation Document No: E-A4-30332 (Rev. A)		
B	30 May 2012	Reflected the change of document by TAMURA Corporation Document No: E-A4-30332 (Rev. B)		
C	3 July 2017	Reflected the change of document by TAMURA Corporation Document No: E-A4-30332 (Rev. C)		
D	1 Apr. 2019	Reflected the change of document by TAMURA Corporation Document No: E-A4-30332 (Rev. D)		
E	13 Dec 2019	Reflected the change of document by TAMURA Corporation Document No: E-A4-30332 (Rev. E)		
		The remainder of this page is intentionally left blank.		

JAXA-QTS-2110/A124E 1 October 2023		J A X A Parts Specification	Page	– ii –
E-A4-30332E				
Revision history				
Rev.	Date	Description		
NC	30 Sept. 2005	Original		
A	30 May 2012	<p>Changed the temperature at 3rd step of Thermal shock from 95°C to 105°C in Table 3.</p> <p>(The temperature of 130°C means the maximum operating temperature in this detail specification.)</p>		
B	5 Feb. 2016	<p>Paragraph 1.1: Scope</p> <p>Added the wording “The products per this specification are manufactured or Wakayanagi Tamura Corporation (Kurihara city of Miyagi)” in the text.</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass</p> <p>Added the wording “Additionally, manufacture line identification code “W” is added to...” and a marking example in (4).</p>		
C	1 Apr. 2019	<p>Paragraph 1.1: Scope</p> <p>Deleted the description about TAMURA Corporation (Sakado city of Saitama) due to unification of the facility.</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass</p> <ul style="list-style-type: none"> • Changed description due to unification of the facility. • Changed the wording "manufacturer line identification letter" to "manufacturer line letter" in the text and marking example. 		
D	13 Dec. 2019	<p>Paragraph 1.1: Scope</p> <p>Added the wording “The transformers and inductors specified herein do not meet outgassing requirements.” in the text.</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass</p> <p>Added the wording “and manufacture line letter” in item (4). (error corrected)</p> <p>Paragraph 4.5: Change to tests and inspections</p> <p>Changed the description to add the shortening of applied time of the test voltage in insulation resistance test.</p>		
E	1 Oct. 2023	<p>Paragraph 2: Applicable Documents</p> <p>Change the wording from "Applicable documents shall be as specified in paragraph A.2.1, appendix A of JAXA-QTS-2110." to "Applicable documents shall be in accordance with paragraph A.2.1, appendix A of JAXA-QTS-2110 and as follows." in the text.</p> <p>Added MIL-W-16878E as an applicable document in item a).</p> <p>Added the note “* As soon as the insulated electrical wires of the MIL-W-16878D are no longer available, those wires of the MIL-W-16878E shall be applied.” in item a).</p> <p>(Due to change in the revision letter of the applicable document “MIL-W-16878” for PTFE wire.)</p>		

JAXA-QTS-2110/A124E 1 October 2023	J A X A Parts Specification	Page	– iii –
			E-A4-30332E
Contents			
1. GENERAL			1
1.1 Scope.....			1
1.2 Part Number			1
1.3 Rating			1
2. APPLICABLE DOCUMENTS.....			2
3. REQUIREMENTS			2
3.1 Qualification Coverage			2
3.2 Externals, Construction, Dimensions, Marking and Mass			3
3.3 Performance			5
3.4 Electrical Characteristics			6
4. QUALITY ASSURANCE PROVISIONS.....			7
4.1 In-Process Inspection.....			7
4.2 Qualification Test			7
4.3 Quality Conformance Inspection			7
4.4 Long-Term Storage			7
4.5 Change to Tests and Inspections			7
5. PREPARATION FOR DELIVERY			7
6. NOTE			7

**TRANSFORMERS AND INDUCTORS, POWER,
HIGH RELIABILITY, SPACE USE,
(NASDA 2110/A124 TYPE)
DETAIL SPECIFICATION FOR**

1. GENERAL

1.1 Scope

This specification establishes the detail requirements for toroidal transformers and inductors with an amorphous core (NASDA 2110/A124 type) specified in JAXA-QTS-2110. The products under this specification are manufactured in Wakayanagi Tamura Corporation (Kurihara city of Miyagi).

The transformers and inductors specified in this specification do not meet outgassing requirements.

1.2 Part Number

The part number shall be indicated in accordance with paragraph A.1.2, appendix A of JAXA-QTS-2110 as shown below. When a purchaser designates a specific part number, corresponding part number in this specification shall be stipulated in a product specification.

(Example)

NASDA ⁽¹⁾ 2110/A124 – T000

|
Identification number

Note: ⁽¹⁾ "NASDA" indicates the part is for space use and may be abbreviated "N".

1.3 Rating

The rating shall be as specified in Table 1.

Table 1. Rating

Item	Applicable paragraph of JAXA-QTS-2110	Characteristic identifier	
		T000	T001 or subsequent
Grade	A.3.3.8	6 (open type)	
Operating ambient temperature	–	-55 to +85°C	As specified in the product specification.
Class	A.3.6.1	R (105°C)	
Operating frequency	–	20kHz	
Input voltage	–	20Vrms	
Output power	–	10.4VA	

JAXA-QTS-2110/A124E 1 October 2023	J A X A Parts Specification	Page	– 2 –
E-A4-30332E			
2. APPLICABLE DOCUMENTS			
Applicable documents shall be in accordance with paragraph A.2.1, appendix A of JAXA-QTS-2110 and as follows.			
a) MIL-W-16878E: Wire, Electrical, Insulated, General Specification for			
* As soon as the insulated electrical wires of the MIL-W-16878D are no longer available, those wires of the MIL-W-16878E shall be applied.			
3. REQUIREMENTS			
Requirements shall be as specified in paragraph A.3, appendix A of JAXA-QTS-2110 and as follows.			
3.1 Qualification Coverage			
The qualification coverage shall be as specified in Table 2.			
Table 2. Qualification Coverage			
No.	Item	Specification to be covered	
1	Class (maximum operating temperature)	R (105°C) maximum	
2	External/internal mounting construction	Adhesion or combination of adhesion and screwing	
	External dimensions (mm)	φ27 x 13 ^H maximum	
	Total volume (cm ³)	7.44 maximum	
3	Operating voltage	175V _{peak} maximum	
	Insulator	Polyester, equivalent or better	
4	Magnet wire diameter (mm)	φ0.12 minimum	
	Coating material	Polyurethane, equivalent or better	
5	Grade	6	
	Insulation, impregnation, and filling material	Epoxy impregnation	
6	Construction and material of terminal	PTFE lead wire (AWG 28 to 18) Direct wiring wire (φ0.4mm to φ1.14mm)	
	Terminal strength	MIL-STD-202, test method 211, test condition A PTFE lead wire: 13.7N maximum Direct wiring wire: 9.8N maximum	
7	Shock	MIL-STD-202, test method 213 Test condition: E (1,000G, 0.5ms, half sine wave) maximum	
	Vibration	MIL-STD-202, test method 204, test condition D maximum MIL-STD-202, test method 214, test condition II-H maximum	
8	Core material	Amorphous	
	Core shape	Toroidal type	
9	Dielectric withstanding voltage	AC 500V maximum	

3.2 Externals, Construction, Dimensions, Marking and Mass

The externals, construction, dimensions and mass shall be as specified in Figure 1. Marking items shall be as follows in accordance with paragraph A.3.4.1, appendix A of JAXA-QTS-2110. If the marking requirements are specified in the product specification, the marking shall satisfy the requirements. Additionally, manufacture line identification code “W” is added to the end of the serial number or to the location specified in the product specification.

- (1) Part number in this specification
- (2) Terminal identification (see Figure 1)
- (3) Lot identification code
- (4) Serial number and manufacture line letter

(Marking example)


Serial number NO.1 W Manufacture line letter
Letter “W”: Wakayanagi Tamura Corporation

- (5) Trademark

If the marking area on the transformer or inductor is limited, the items above may be abbreviated or omitted in the following order of precedence.

- (1) “2110/A” of the part number
- (2) Trademark

E-A4-30332E

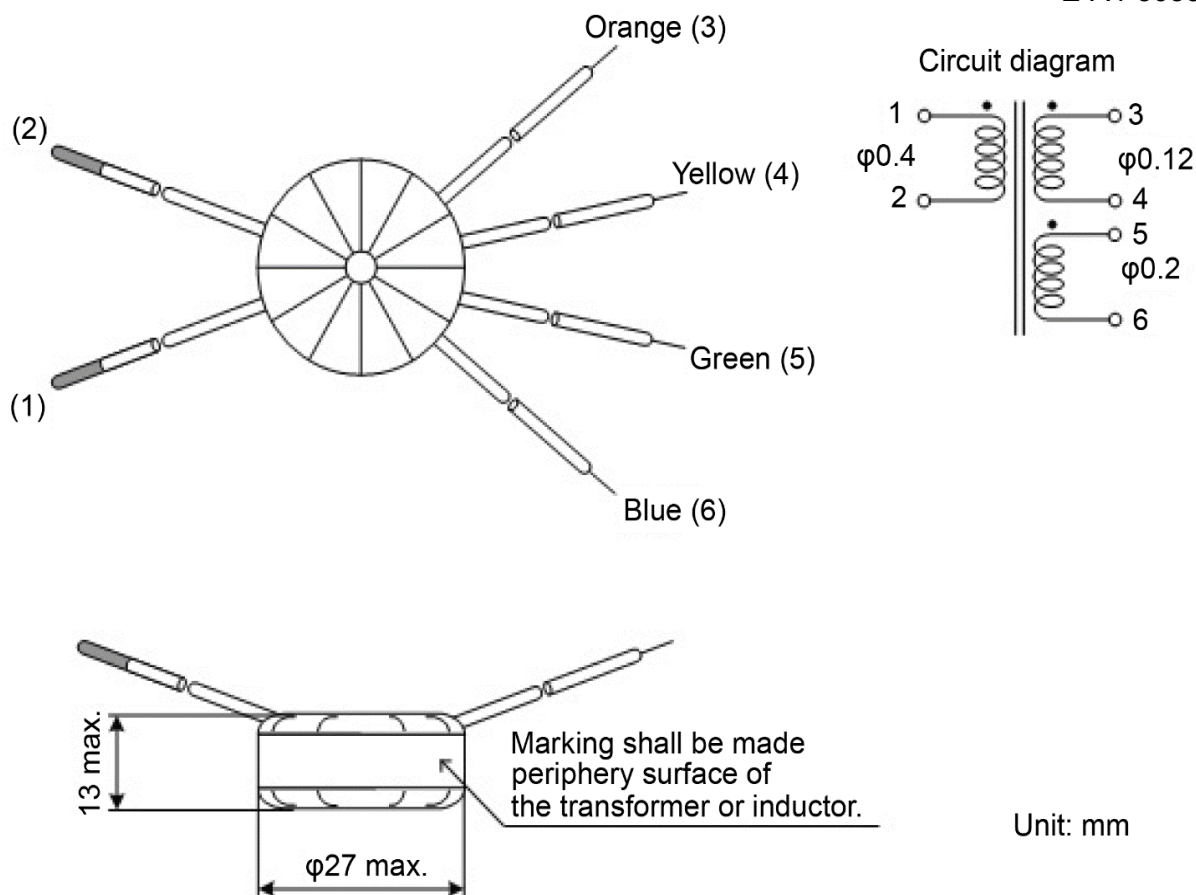

1. Lead wire length: 100mm minimum
Direct wiring wires of $\phi 0.4$ mm for terminals 1, 2
AWG 28 for terminals 3, 4, 5, 6
Coating removed approx. 10mm at the end
2. Mass: 17g maximum

Figure 1. Externals, Construction, Dimensions, Marking and Mass⁽¹⁾

Note: ⁽¹⁾ Figure 1 shall be applicable to all certified products. Externals, construction, dimensions, marking and mass of Individual product included in the qualification coverage shall be as specified in the product specification.

JAXA-QTS-2110/A124E 1 October 2023	J A X A Parts Specification	Page	– 5 –
---------------------------------------	--------------------------------	------	-------

E-A4-30332E

3.3 Performance

Performance requirements shall be as specified in Table 3.

Table 3. Performance Requirements ⁽¹⁾


Item	Requirement paragraph of JAXA-QTS-2110	Performance
Electrical characteristics	A.3.7.1	As specified in Table 4.
Dielectric withstanding voltage	A.3.7.2	At sea level: AC500V for 1 minute At reduced pressure: AC300V, 1.1kPa for 1 minute
Interlayer withstanding voltage	A.3.7.3	40kHz, sine wave of 40Vrms applied between (1-2) for 5±0.5s
Insulation resistance	A.3.7.4	DC100V, a) 10,000MΩ minimum
Corona discharge	A.3.7.5	N/A
Temperature rise	A.3.7.6	20°C maximum (ambient temperature: 85°C)
Overload	A.3.7.7	Ambient temperature: 105°C – measured temperature rise
Electrical continuity	A.3.7.8	As specified in appendix A of JAXA-QTS-2110.
Terminal strength (pull)	A.3.8.1	PTFE lead wire: 13.7N Direct wiring wire: 9.8N
Solderability	A.3.8.2	N/A
Resistance to soldering heat	A.3.8.3	N/A
Seal	A.3.8.4	N/A
Vibration	A.3.9.1	High frequency: As specified in appendix A of JAXA-QTS-2110. Random: As specified in appendix A of JAXA-QTS-2110.
Shock	A.3.9.2	Test condition: E (1,000G, 0.5ms, semi sine wave)
Thermal shock	A.3.9.3	Test condition: A-1 (temperature at 3rd step: 105°C)
Immersion	A.3.9.4	N/A
Moisture resistance	A.3.9.5	As specified in appendix A of JAXA-QTS-2110.
Flammability	A.3.9.6	N/A
Resistance to solvents	A.3.9.7	N/A
Life	A.3.10.1	Ambient temperature: 105°C – measured temperature rise

Note ⁽¹⁾ This table shall be applicable to all qualified products. Performance of individual product included in the qualification coverage shall be as specified in the product specification.

3.4 Electrical Characteristics

The electrical characteristics shall be as shown in Table 4.

Table 4. Electrical Characteristics ⁽¹⁾

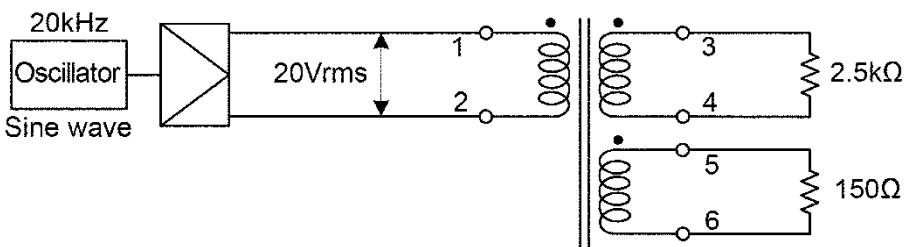Item	Rating
Operating frequency	20kHz±10% (sine wave)
Input voltage	20Vrms
Winding ratio	$(3-4) / (1-2) = 6.19 \pm 3\%$ $(5-6) / (1-2) = 1.27 \pm 3\%$
Impedance	(1-2) = 1kΩ minimum at 20kHz, 10V
DC resistance (at 20°C)	(1-2) = 0.45Ω maximum (3-4) = 23Ω maximum (5-6) = 1.8Ω maximum
Output	10.4VA
Polarity	Test points 1, 3, and 5 shall have the same polarity.
Test circuit	

Note ⁽¹⁾ This table shall be applicable to all certified products. Electrical characteristics of individual product included in the qualification coverage shall be as specified in the product specification.

JAXA-QTS-2110/A124E 1 October 2023	J A X A Parts Specification	Page	– 7 –
<div data-bbox="1283 192 1460 226" data-label="Text">E-A4-30332E</div> <div data-bbox="205 226 759 259" data-label="Section-Header"> <h4>4. QUALITY ASSURANCE PROVISIONS</h4> </div> <div data-bbox="248 273 1393 344" data-label="Text"> <p>Quality assurance provisions shall be as specified in paragraph A.4, appendix A of JAXA-QTS-2110.</p> </div> <div data-bbox="205 385 564 418" data-label="Section-Header"> <h5>4.1 In-Process Inspection</h5> </div> <div data-bbox="277 432 1430 504" data-label="Text"> <p>The in-process inspection shall be as specified in paragraph A.4.1, appendix A of JAXA-QTS-2110.</p> </div> <div data-bbox="205 544 510 577" data-label="Section-Header"> <h5>4.2 Qualification Test</h5> </div> <div data-bbox="277 591 1434 663" data-label="Text"> <p>The qualification test shall be as specified in paragraph A.4.2, appendix A of JAXA-QTS-2110.</p> </div> <div data-bbox="205 701 700 736" data-label="Section-Header"> <h5>4.3 Quality Conformance Inspection</h5> </div> <div data-bbox="277 748 1434 822" data-label="Text"> <p>The quality conformance inspection shall be as specified in paragraph A.4.3, appendix A of JAXA-QTS-2110.</p> </div> <div data-bbox="205 862 537 896" data-label="Section-Header"> <h5>4.4 Long-Term Storage</h5> </div> <div data-bbox="277 909 1406 981" data-label="Text"> <p>Long-term storage shall be as specified in paragraph A.4.5, appendix A of JAXA-QTS-2110.</p> </div> <div data-bbox="205 1021 713 1055" data-label="Section-Header"> <h5>4.5 Change to Tests and Inspections</h5> </div> <div data-bbox="277 1068 611 1142" data-label="Section-Header"> <h6>a) Insulation Resistance (Standard)</h6> </div> <div data-bbox="392 1149 1361 1223" data-label="Text"> <p>Insulation resistance in accordance with test method 302 of MIL-STD-202 is specified as follows.</p> </div> <div data-bbox="392 1229 1366 1344" data-label="Text"> <p>“If the instrument reading indicates that an insulation resistance meets the specified limit (2 minimum), and is steady or increasing, the test may be terminated before the end of the specified period (2 minimum) “</p> </div> <div data-bbox="336 1386 659 1422" data-label="Section-Header"> <h6>(Shortening of test time)</h6> </div> <div data-bbox="392 1429 1449 1621" data-label="Text"> <p>From the test result and verification result, it was verified that the instrument reading increases or become stable within 2 minutes from the start of voltage application. Therefore, when the above condition is met and the measurement reaches the 10-times of 10 thousand MΩ as a minimum (which is more than 100 thousand MΩ), the test may be terminated before 2-minute passes.</p> </div> <div data-bbox="205 1693 687 1724" data-label="Section-Header"> <h4>5. PREPARATION FOR DELIVERY</h4> </div> <div data-bbox="248 1740 1393 1812" data-label="Text"> <p>Preparation for delivery shall be as specified in paragraph A.5, appendix A of JAXA-QTS-2110.</p> </div> <div data-bbox="205 1845 335 1879" data-label="Section-Header"> <h4>6. NOTE</h4> </div> <div data-bbox="248 1895 1364 1928" data-label="Text"> <p>Details of notes shall be as specified in paragraph A.6, appendix A of JAXA-QTS-2110.</p> </div>			