

Cancelled

Title: TRANSFORMERS AND INDUCTORS, POWER,
(OUTGASSING-QUALIFIED),
HIGH RELIABILITY,SPACE USE,
DETAIL SPECIFICATION FOR
(JAXA 2110/A151 TYPE)

Document number: JAXA-QTS-2110/A151F

Cancellation date: 1 October 2023

JAXA
JAPAN AEROSPACE EXPLORATION AGENCY

Registration No. 1266

JAXA-QTS-2110/A151F

28 March 2023

Superseding

JAXA-QTS-2110/A151E

Cancelled

28 March 2023

TRANSFORMERS AND INDUCTORS, POWER,
(OUTGASSING-QUALIFIED),
HIGH RELIABILITY, SPACE USE,
(JAXA 2110/A151 TYPE)
DETAIL SPECIFICATION FOR

Prepared and Established by TAMURA CORPORATION


Issued by JAPAN AEROSPACE EXPLORATION AGENCY

This document is the English version of JAXA QTS/ADS which was originally written and authorized in Japanese and carefully translated into English for international users. If any question arises as to the context or detailed description, it is strongly recommended to verify against the latest official Japanese version.

The release date of the English version of this specification: 27 March 2024


JAXA-QTS-2110/A151F 28 March 2023		J A X A Parts Specification	Page	– i –
Revision history				
Rev.	Date	Description		
NC	31 May 2006	Original		
A	7 Feb. 2008	<p>(1) Extended the qualification coverage regarding construction and material of terminal. (Table 2)</p> <ul style="list-style-type: none"> • PTFE lead wire (28 to 18 AWG) → (28 AWG min.) • Direct wiring wire (φ0.4mm to φ1.14mm) → (φ0.4mm min.) <p>(2) Extended the qualification coverage regarding terminal strength. (Tables 2 and 3)</p> <ul style="list-style-type: none"> • PTFE lead wire over 18 AWG: 13.7N max. → 19.6N max. • Direct wiring wire over φ1.14mm: 9.8N max. → 19.6N max. 		
B	30 May 2012	(1) Changed the temperature at the 3rd step of Thermal shock from 115°C to 130°C in Table 3. (130°C to be the highest operating temperature.)		
C	5 Feb. 2016	<p>Paragraph 1.1: Scope: Added “The products per this specification are manufactured or Wakayanagi Tamura Corporation (Kurihara city of Miyagi)”</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass: Added “Additionally, manufacture line identification code “W” is added to...” and a marking example in (4).</p>		
D	1 Apr. 2019	<p>Paragraph 1.1: Scope: Deleted the description about Tamura Corporation (Sakado city of Saitama) due to unification of the facility.</p> <p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass:</p> <ul style="list-style-type: none"> • Deleted the description “Tamura Corporation” • Changed manufacturer line identification letter to manufacturer line letter in the text and marking example. 		
E	13 Dec. 2019	<p>Paragraph 3.2: Externals, Construction, Dimensions, Marking and Mass:</p> <p>(4) Added “and manufacture line letter”. (not listed)</p> <p>Paragraph 4.5: Change to tests and inspections: Added the description about the shortening of applied time of the test voltage in insulation resistance test.</p>		
F	28 Mar. 2023	<p>Extended the qualification coverage for the following items to the same scope of qualification as A114 type.</p> <p>Paragraph 3.1: Qualification coverage, Table 2 Qualification coverage “Shock”</p> <ul style="list-style-type: none"> • Test condition: 840G, 0.6ms → 1000G, 0.4ms <p>Paragraph 3.3: Performance, Table 3 Performance Requirements. “Shock”</p> <ul style="list-style-type: none"> • Test conditions: 840G, 0.6ms → 1000G, 0.4ms 		

JAXA-QTS-2110/A151F 28 March 2023	J A X A Parts Specification	Page	– ii –
Contents			
1. GENERAL		5	
1.1 Scope		5	
1.2 Part Number		5	
1.3 Rating		5	
2. APPLICABLE DOCUMENTS		6	
3. REQUIREMENTS		6	
3.1 Qualification Coverage		6	
3.2 Externals, Construction, Dimensions, Marking and Mass		7	
3.3 Performance		9	
3.4 Electrical Characteristic		10	
4. QUALITY ASSURANCE PROVISIONS		11	
4.1 In-Process Inspection		11	
4.3 Quality Conformance Inspection		11	
4.4 Long-Term Storage		11	
4.5 Change to Tests and Inspections		11	
5. PREPARATION FOR DELIVERY		11	
6. NOTES		11	

JAXA-QTS-2110/A151F 28 March 2023	J A X A Parts Specification	Page	– 1 –
<p align="center">JAXA 2110/A151 TYPE, TRANSFORMERS AND INDUCTORS, POWER, (OUTGASSING-QUALIFIED), HIGH RELIABILITY, SPACE USE, DETAIL SPECIFICATION FOR</p>			
1. GENERAL			
1.1 Scope			
<p>This specification establishes the detail requirements for toroidal transformers and inductors with an molybdenum permalloy powder (MPP) core (JAXA 2110/A151 type) of space use, high reliability, transformers and inductors that satisfied JAXA-QTS-2110, Transformers and Inductors, High Reliability, Space use, General Specification for. The products per this specification are manufactured in Wakayanagi Tamura Corporation (Kurihara city of Miyagi).</p> <p>Transformers and inductors specified herein shall meet the requirements for outgassing.</p>			
1.2 Part Number			
<p>The part number shall be indicated in accordance with paragraph A.1.2., Appendix A of JAXA-QTS-2110 as shown below. When a purchaser designates a specific part number, the corresponding part number in this specification shall be provided in a product specification.</p> <p>(Example) JAXA⁽¹⁾ 2110/A151 –T000</p> <div style="text-align: center;">  <p>Identification number</p> </div> <p>Note ⁽¹⁾ "JAXA" indicates the part is for space use and may be abbreviated "J."</p>			
1.3 Rating			
The rating shall be as specified in Table 1.			
Table 1. Rating			
Item	Applicable paragraph of JAXA-QTS-2110	Identification number	
		T000	T001 or subsequent
Grade	A.3.3.8	6 (open type)	
Operating ambient temperature	–	-55 to +100°C	As specified in the product specification.
Class	A.3.6.1	S (130°C)	
Operating frequency	–	20kHz	
Input voltage	–	50Vrms	
Output power	–	253VA	

JAXA-QTS-2110/A151F 28 March 2023	J A X A Parts Specification	Page	– 2 –
<p>2. APPLICABLE DOCUMENTS</p> <p>Applicable documents shall be as specified in paragraph A.2.1, Appendix A of JAXA-QTS-2110.</p>			
<p>3. REQUIREMENTS</p> <p>Requirements shall be as follows and as specified in Section A.3, Appendix A of JAXA-QTS-2110.</p>			
<p>3.1 Qualification Coverage</p> <p>The qualification coverage shall be as specified in Table 2.</p> <p style="text-align: center;">Table 2. Qualification Coverage</p>			
No.	Item	Specification to be covered	
1	Class (maximum operating temperature)	S (130°C) max.	
2	External/internal mounting construction	Adhesion or combination of adhesion and screwing	
	External dimensions (mm)	φ80 x 48 ^H max.	
	Total volume (cm ³)	241.2 max.	
3	Operating voltage	175V _{peak} max.	
	Insulation	Polyester, equivalent or better	
4	Magnet wire diameter (mm)	φ0.14 min.	
	Coating material	Polyester, equivalent or better	
5	Grade	6	
	Insulation, impregnation, and filling material	Epoxy impregnation	
6	Construction and material of terminal	PTFE lead wire (28 AWG min.) Direct wiring wire (φ0.4mm min.)	
	Terminal strength	MIL-STD-202, test method 211, test condition A PTFE lead wire: 19.6 max. (over 18 AWG) : 13.7N max. (28 to 18 AWG) Direct wiring wire: 19.6N max. (over φ1.14mm) : 9.8N max. (φ0.4mm to 1.14mm)	
7	Shock	MIL-STD-202, test method 213 Test conditions: 1000G, 0.4ms, half sine wave max.	
	Vibration	MIL-STD-202, test method 204, test condition D max. MIL-STD-202, test method 214, test condition II-H max.	
8	Core material	MPP	
	Core shape	Toroidal type	
9	Dielectric withstanding voltage	AC 500V max.	
10	Outgassing	TML: 1.0% max., CVCM: 0.1% max.	

JAXA-QTS-2110/A151F 28 March 2023	J A X A Parts Specification	Page	– 3 –
<div data-bbox="188 465 1015 501" data-label="Section-Header"> <h3>3.2 Externals, Construction, Dimensions, Marking and Mass</h3> </div> <div data-bbox="280 515 1455 748" data-label="Text"> <p>The externals, construction, dimensions and mass shall be as specified in Figure 1. Marking items shall be as follows in accordance with paragraph A.3.4.1, Appendix A of JAXA-QTS-2110. If the product specification has marking requirements, the marking shall be made as specified in the product specification. Additionally, manufacture line letter “W” is added to the end of the serial number or to the location specified in the product specification.</p> </div> <div data-bbox="280 792 884 949" data-label="List-Group"> <ul style="list-style-type: none"> (1) Part numbers given in this specification (2) Terminal identification (See Figure 1.) (3) Lot identification code (4) Serial number and manufacture line letter </div> <div data-bbox="389 994 632 1030" data-label="Text"> <p>(Marking example)</p> </div> <div data-bbox="389 1075 1417 1196" data-label="Text"> <div style="display: flex; align-items: center; justify-content: center;"> <div style="text-align: center; margin-right: 20px;"> <u>NO.1</u> Serial number </div> <div style="margin: 0 10px;"> — </div> <div style="text-align: center; margin-right: 20px;"> <u>W</u> Manufacture line letter </div> <div style="margin-left: 20px;"> Letter “W”: Wakayanagi Tamura Corporation </div> </div> </div> <div data-bbox="280 1285 1442 1500" data-label="List-Group"> <ul style="list-style-type: none"> (5) Trademark <p>If the marking area on the transformer or inductor is limited, the items above may be abbreviated or omitted in the following order of precedence.</p> <ul style="list-style-type: none"> (1) “2110/A” of the part number (2) Trademark </div>			

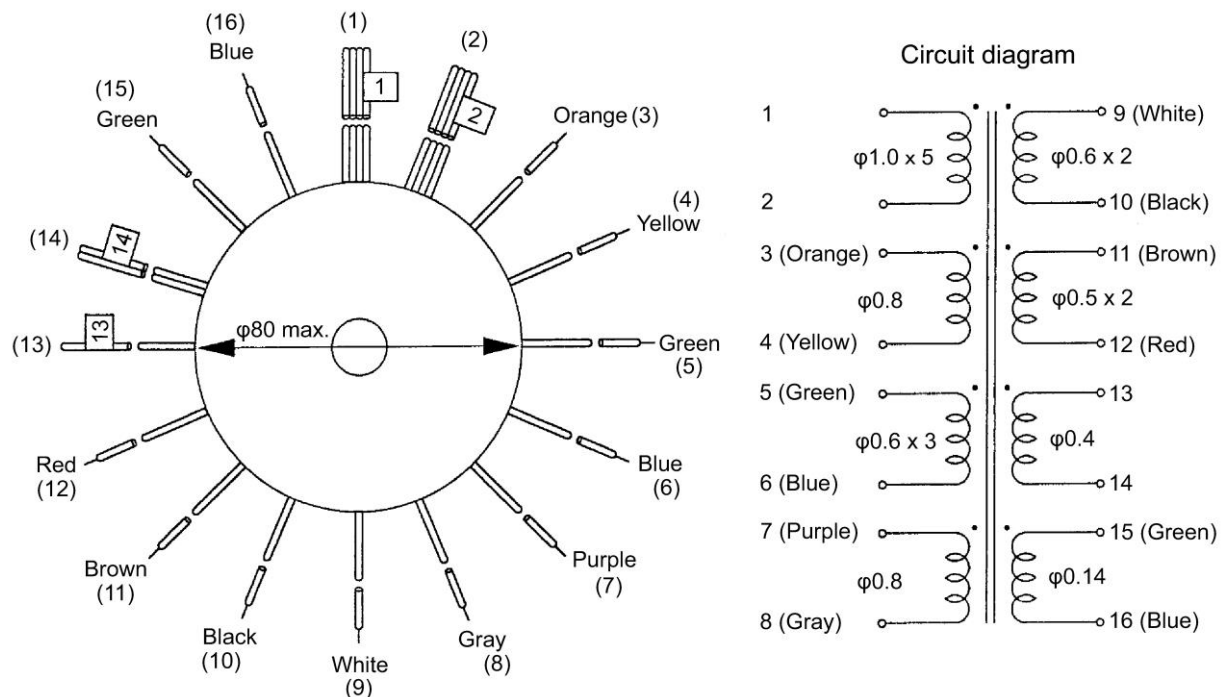

Unit: mm

1. Lead wire length: 100mm min.
No.18 AWG for terminals 5, 6
No.20 AWG for terminals 3, 4, 7, 8, 9, 10, 11, 12
No.28 AWG for terminals 15, 16
Direct wiring wires of $\phi 1.0\text{mm} \times 5$ for terminals 1, 2
Direct wiring wires of $\phi 0.4\text{mm}$ for terminals 13, 14
Coating removed approx.10mm at the end
2. Mass: 900g max.

Figure 1. Externals, Construction, Dimensions, Marking and Mass⁽¹⁾

Note ⁽¹⁾ Figure 1 shall be applicable to all certified products. Externals, construction, dimensions, marking and mass of Individual product included in the qualification coverage shall be as specified in the product specification.

JAXA-QTS-2110/A151F 28 March 2023	J A X A Parts Specification	Page	– 5 –
3.3 Performance			
Performance requirements shall be as specified in Table 3.			
Table 3. Performance Requirements (¹)			
Item	Requirement paragraph of JAXA-QTS-2110	Performance	
Electrical characteristics	A.3.7.1	As specified in Table 4.	
Dielectric withstanding voltage	A.3.7.2	At barometric pressure: AC500V for 1 minute At reduced pressure: 1.1kPa, AC300V for 1 minute	
Interlayer withstanding voltage	A.3.7.3	100kHz, sine wave of 100Vrms applied between (1-2) for 5±0.5s	
Insulation resistance	A.3.7.4	DC100V, a) 10,000MΩ min.	
Corona discharge	A.3.7.5	N/A	
Temperature rise	A.3.7.6	30°C max. (ambient temperature: 100°C)	
Overload	A.3.7.7	Ambient temperature: 130°C – measured temperature rise	
Electrical continuity	A.3.7.8	As specified in Appendix A of JAXA-QTS-2110.	
Terminal strength (pull)	A.3.8.1	PTFE lead wire: 19.6 max. (over 18 AWG) 13.7N max. (28 to 18 AWG) Direct wiring wire: 19.6N max. (over ϕ1.14mm) 9.8N max. (ϕ0.4mm to 1.14mm)	
Solderability	A.3.8.2	N/A	
Resistance to soldering heat	A.3.8.3	N/A	
Seal	A.3.8.4	N/A	
Vibration	A.3.9.1	High frequency: As specified in Appendix A of JAXA-QTS-2110. Random: As specified in Appendix A of JAXA-QTS-2110.	
Shock	A.3.9.2	Test conditions:1000G, 0.4ms, half sine wave	
Thermal shock	A.3.9.3	Test condition A-1 (temperature at 3rd step: 130°C)	
Immersion	A.3.9.4	N/A	
Moisture resistance	A.3.9.5	As specified in Appendix A of JAXA-QTS-2110.	
Flammability	A.3.9.6	N/A	
Resistance to solvent	A.3.9.7	N/A	
Life	A.3.10.1	Ambient temperature: 130°C – measured temperature rise	
Note (¹) This table shall be applicable to all certified products. Performance of individual product included in the qualification coverage shall be as specified in the product specification.			

3.4 Electrical Characteristic

The electrical characteristics shall be as shown in Table 4.

Table 4. Electrical Characteristics⁽¹⁾

Item	Rating
Operating frequency	20kHz±10% (sine wave)
Input voltage	50Vrms
Winding ratio	$(3-4) / (1-2) = 2.467 \pm 3\%$ $(5-6) / (1-2) = 1.000 \pm 3\%$ $(7-8) / (1-2) = 2.467 \pm 3\%$ $(9-10) / (1-2) = 1.200 \pm 3\%$ $(11-12) / (1-2) = 1.200 \pm 3\%$ $(13-14) / (1-2) = 1.000 \pm 3\%$ $(15-16) / (1-2) = 0.800 \pm 4\%$
Inductance	(1-2) = 90μH min. at 10kHz, 0.1V, DC10A
DC resistance (at 20°C)	(1-2) = 0.03Ω max, (9-10) = 0.30Ω max (3-4) = 0.40Ω max, (11-12) = 0.35Ω max (5-6) = 0.20Ω max, (13-14) = 0.90Ω max (7-8) = 0.45Ω max, (15-16) = 5.00Ω max
Output	253VA
Polarity	Test points 1, 3, 5, 7, 9, 11, 13, and 15 shall have the same polarity.
Test circuit	

Note ⁽¹⁾ This table shall be applicable to all certified products. Electrical characteristics of individual product included in the qualification coverage shall be as specified in the product specification.

JAXA-QTS-2110/A151F 28 March 2023	J A X A Parts Specification	Page	– 7 –
<p>4. QUALITY ASSURANCE PROVISIONS</p> <p>Quality assurance provisions shall be as specified in Section A.4, Appendix A of JAXA-QTS-2110.</p> <p>4.1 In-Process Inspection</p> <p>The in-process inspection shall be as specified in paragraph A.4.1, Appendix A of JAXAQTS-2110.</p> <p>4.2 Qualification Test</p> <p>The qualification test shall be as specified in paragraph A.4.2, Appendix A of JAXA-QTS-2110.</p> <p>4.3 Quality Conformance Inspection</p> <p>The quality conformance inspection shall be as specified in paragraph A.4.3, Appendix A of JAXA-QTS-2110.</p> <p>4.4 Long-Term Storage</p> <p>Long-term storage shall be as specified in paragraph A.4.5, Appendix A of JAXA-QTS-2110.</p> <p>4.5 Change to Tests and Inspections</p> <p>a) Insulation Resistance</p> <p>(Standard) Insulation resistance in accordance with test method 302 of MIL-STD-202 is specified as follows. “If the instrument reading indicates that an insulation resistance meets the specified limit (2 min.), and is steady or increasing, the test may be terminated before the end of the specified period (2 min.)”</p> <p>(Shortening of test time) From the test result and verification result, it was verified that the instrument reading increases or become stable within 2 minutes from the start of voltage application. Therefore, when the above condition is met and the measurement reaches the 10-times of 10 thousand MΩ as a minimum (which is more than 100 thousand MΩ), the test may be terminated before 2-minute passes.</p> <p>5. PREPARATION FOR DELIVERY</p> <p>Preparation for delivery shall be as specified in Section A.5, Appendix A of JAXA-QTS-2110.</p> <p>6. NOTES</p> <p>Details of notes shall be as specified in Section A.6, Appendix A of JAXA-QTS-2110.</p>			